

USER'S GUIDE

MIKROS™



EFD®
A NORDSON COMPANY

USA: 800-556-3484 or +1-401-434-1680
Europe: 0800 585733 or +44 (0) 1582 666334
Asia: +86 (21) 5854 2345
technical@efd-inc.com www.efd-inc.com

Parts & Maintenance

Replacement Parts

Part #	Description
5840-B	Loading tube, (50) per bag
5866	Piston installation tool
5863	Neoprene sleeve for grip
5864-B	Dampening O-ring; Buna-N
5865-B	Air seal O-ring; Buna-N (standard)
5865V-B	Air seal O-ring; Viton® (optional)


Note: O-rings are supplied (10) per bag.

Mikros Fluid Reservoir Tips

Polypropylene 0.25cc fluid reservoirs with either chamfered or blunt-end, burr-free, passivated stainless steel tips. Molded silicone-free with UV blocking agent. Packaged with tip protectors. (25) tips and pistons per box.

Part #	Description
5830CH-B	Chamfered, 30 gauge, 0.15 mm ID (.006"), lavender
5833CH-B	Chamfered, 33 gauge, 0.10 mm ID (.004"), grey
5832-B	Blunt-end, 32 gauge, 0.10 mm ID (.004"), yellow

To Service O-ring Seals

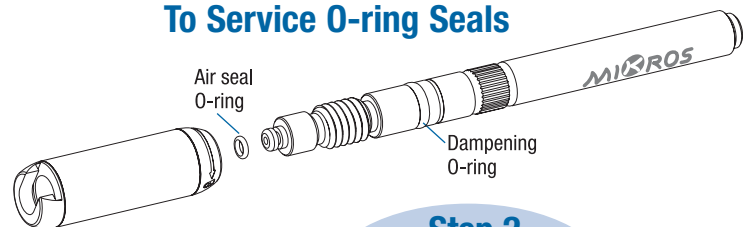

Step 1.

Rotate grip toward "unlock" and remove it from the pen body.

Step 2.

Replace O-ring with new lubricated O-rings.

Step 3.

Reinstall the grip on the pen body.

EFD®
A NORDSON COMPANY


For EFD sales and service in over 30 countries,
contact EFD or go to www.efd-inc.com/contact

USA: 800-556-3484 or +1-401-434-1680
Europe: 0800 585733 or +44 (0) 1582 666334
Asia: +86 (21) 5854 2345
technical@efd-inc.com www.efd-inc.com


Viton is a registered trademark of DuPont.
©2006 Nordson Corporation 5800MP-MAN-01 v062606

Loading

CAUTION: Fill reservoir no higher than maximum fill level shown.

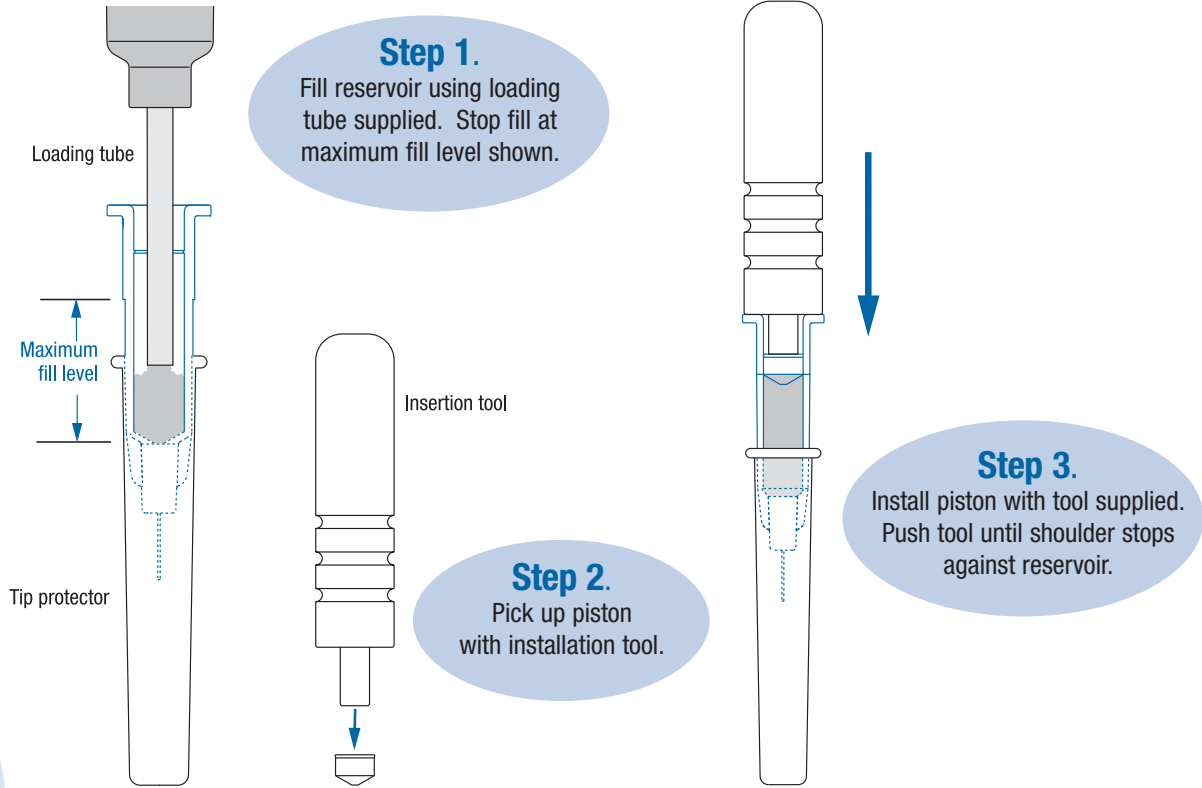

Setup

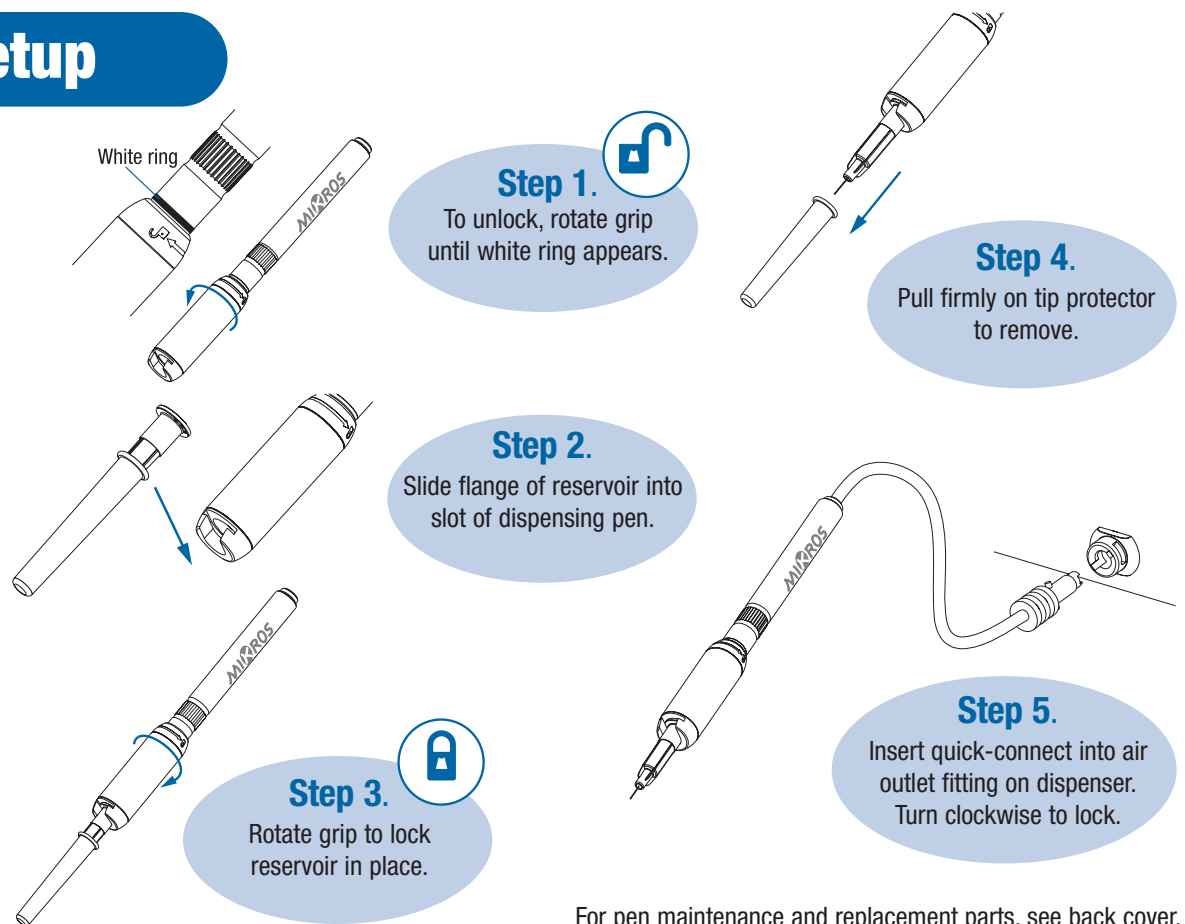

For pen maintenance and replacement parts, see back cover.