


8000BF Series Automatic Syringe Fillers

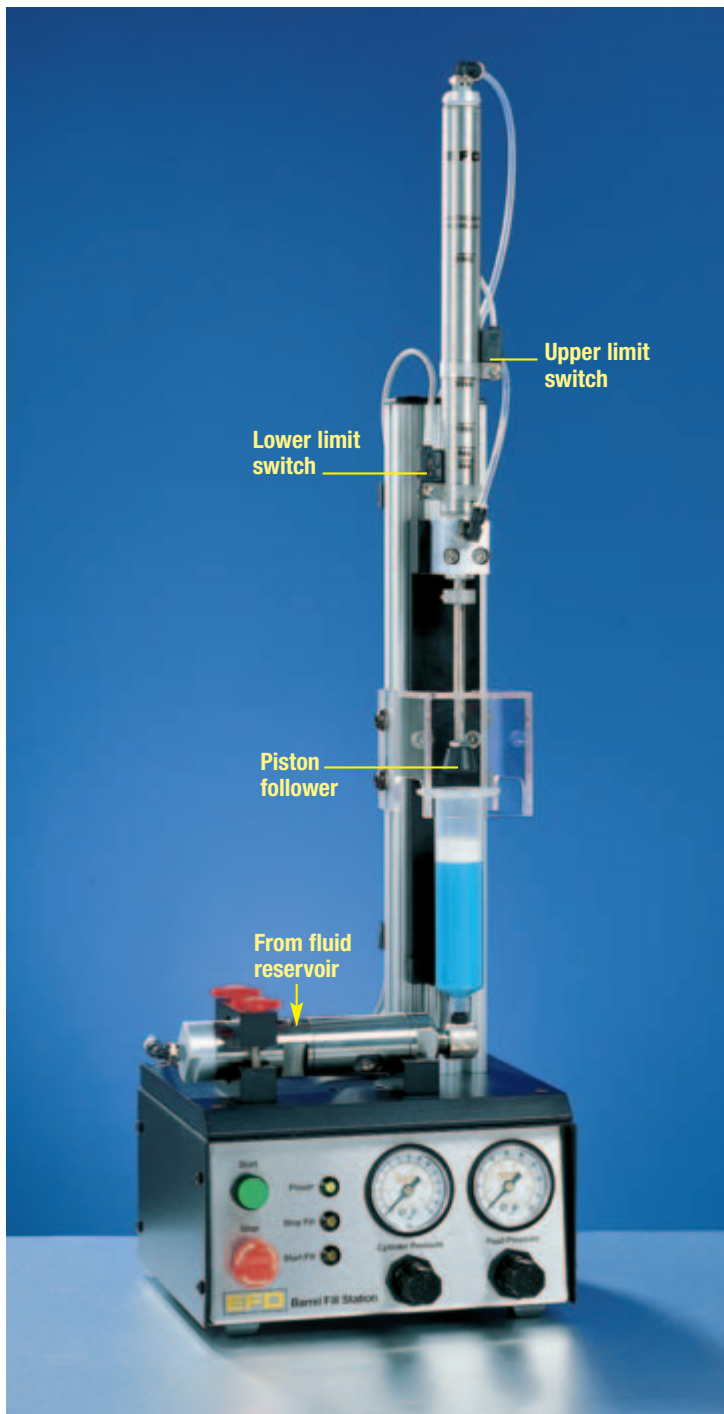


The 8000BF Series automatic syringe filler provides consistent filling for all types of nonpourable assembly fluids. Microprocessor circuitry ensures fail-safe operation when filling 3, 5, 10, 30 or 55cc syringes.


Features

- Consistent, volumetric filling of pastes, gels and other nonpourable fluids.
- Easy adjustment for any volume.
- Accommodates 3cc to 55cc syringes.
- $\pm 2\%$ (by weight) repeat fill accuracy.
- Built-in flow controls prevent spillage and air entrapment.
- Positive cutoff.
- Microprocessor controlled.
- Push-button or foot-pedal operation.


Setup Configurations

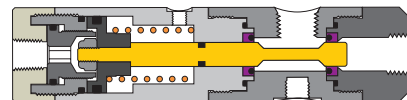

8000BF-HPA for use with high pressure up to 2,500 psi (172.5 bar) fluid lines.

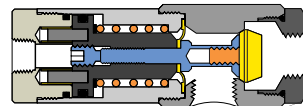

8000BF-HF for use with cartridge and tank reservoirs at pressures up to 100 psi (6.9 bar).



8000BF-PW for use with reactive fluids that require disposable fluid path – 80 psi (5.5 bar) pressure rating.

*thick pastes gels solder paste greases silicones gasketing sealants
adhesives epoxies brazing paste vinyl adhesives lubricants creams*



phone 800-556-3484

fax 401-431-0237

info@efd-inc.com